

JC17 Rec'd PCT/PTO 20 JUN 2001

TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371		ATTORNEY'S DOCKET NUMBER AAO-255
		U.S. APPLICATION NO. (if known, see 37 C.F.R. 1.5) 09/868580
INTERNATIONAL APPLICATION NO. PCT/JP99/07165	INTERNATIONAL FILING DATE 21 December 1999	PRIORITY DATE CLAIMED 21 December 1998

TITLE OF INVENTION:
AN APPARATUS FOR PREPARING A FLUID FOR MEDICAL PROCEDURE

APPLICANT(S) FOR DO/EO/US
Naohiko MORIYAMA, Tetsuya YANO, Ken IMAI & Tsuneo DEGUCHI

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

- ☒ This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.
- ☐ This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.
- ☒ This express request to begin national examination procedures (35 U.S.C. 371(f) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(I).
- ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
- ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - ☒ has been transmitted by the International Bureau
 - ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
- ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
- ☒ Amendment to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).
 - ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - ☐ have been transmitted by the International Bureau.
 - ☐ have not been made; however, the time limit for making such amendment has NOT expired.
 - ☒ have not been made and will not be made.
- ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
- ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
- ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11 to 16 below concern either document(s) or information included:

- ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
- ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
- ☐ A FIRST preliminary amendment.
 - ☐ A SECOND or SUBSEQUENT preliminary amendment.
- ☐ A substitute specification.
- ☐ A change of power of attorney and/or address letter.
- ☐ Other items or information.

JG18 Rec'd PCT/PTO 2 0 JUN 2001

U.S. APPLICATION NO. 09/868580		INTERNATIONAL APPLICATION NO. PCT/JP99/07165		ATTORNEY'S DOCKET NUMBER AA0-255					
17. <input checked="" type="checkbox"/> The following fees are submitted: <div style="margin-left: 20px;"> Basic National Fee (37 CFR 1.49(a)(1)-(5): Search Report has been prepared by the EPO or JPO..... International preliminary examination fee paid to USPTO (37 CFR 1.482) No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2))..... Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO..... International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4)..... </div>				<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 60%;">CALCULATIONS</td> <td style="width: 40%;">PTO USE ONLY</td> </tr> <tr> <td colspan="2" style="height: 100px; vertical-align: top;"> <div style="text-align: right; font-weight: bold;">\$ 860.00</div> </td> </tr> </table>		CALCULATIONS	PTO USE ONLY	<div style="text-align: right; font-weight: bold;">\$ 860.00</div>	
CALCULATIONS	PTO USE ONLY								
<div style="text-align: right; font-weight: bold;">\$ 860.00</div>									
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$ 860.00					
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.49(e)).				<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 60%;">\$</td> <td style="width: 40%;"></td> </tr> </table>		\$			
\$									
Claims	Number Filled	Number Extra	Rate						
Total Claims	19-20=	0	X \$18	\$					
Independent Claims	4-3=	1	X \$80	\$ 80.00					
Multiple dependent claim(s) (if applicable)			+ \$270	\$					
TOTAL OF ABOVE CALCULATIONS				=	\$				
Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must also be filed. (Note 37 CFR 1.9, 1.27, 1.28)				\$					
SUBTOTAL				=	\$ 940.00				
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.49(f)).				+	\$				
TOTAL NATIONAL FEE				=	\$ 940.00				
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate sheet (37 CFR 3.28, 3.31). \$40.00 per property				+	\$				
TOTAL FEES ENCLOSED				=	\$				
				Amount to be refunded	\$				
				charged:	\$				
a. <input type="checkbox"/> A check in the amount of \$_____ to cover the above fees is enclosed. b. <input checked="" type="checkbox"/> Please charge my Deposit Account No. <u>18-0013</u> in the amount of \$ <u>940.00</u> to cover the above fees. A duplicate of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>18-0013</u> . A duplicate copy of this sheet is enclosed.									
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.									
SEND ALL CORRESPONDENCE TO: Rader, Fishman & Grauer, L.P.P.C. 1233 20 th Street, N.W., Suite 501 Washington, DC 20036 Dated: June 20, 2001									
				 _____ Robert S. Green	SIGNATURE NAME 41,800 REGISTRATION NUMBER				

DESCRIPTION

AN APPARATUS FOR PREPARING A FLUID
FOR A MEDICAL PROCEDURE

5

BACKGROUND OF THE INVENTION

1. Field of the Invention

The invention relates to an apparatus for preparing a fluid for a medical procedure, an opener for unsealing a vessel containing a medicament, and a cutter for the opener.

2. Description of the Related Art

Recently, an apparatus for preparing a fluid for a medical procedure, such as dialysis treatment, has been proposed. The fluids for dialysis treatment includes an acetic acid aqueous solution, which is prepared by diluting an acetic acid stock solution with water, in particular reverse osmosis water (referred to RO water in this specification), and a sodium bicarbonate aqueous solution, which is prepared by dissolving sodium bicarbonate powder in RO water.

Japanese Patent Publication (Kokai) No. 5-168678 (JPP '678) describes an apparatus for preparing sodium bicarbona aqueous solution. The apparatus holds an inverted vessel for containing a solid medicament, sodium bicarbona, in the form of a powder or granules, after the vessel is unsealed, so that the contents fall by gravity into a tank which contains water. The tank includes an agitator for promoting the mixing of the medicament with the water. The apparatus of JPP '678 has a problem that the sodium bicarbona, which has been fallen into the tank, cannot be solved quickly in the water within the tank since the dissolid medicament deposits on the bottom of the tank.

Japanese Patent Publication (Kokai) No. 4-84967 (JPP '967) also describes an apparatus for preparing sodium

09868580-062001

bicarbona aqueous solution. The apparatus is configured to dissolve and wash out sodium bicarbonate contained within a vessel by spraying water into the inverted vessel after the vessel is unsealed. However, with the apparatus of JPP '967, dissolving the solid content within the vessel cannot be sufficiently carried out due the small volume available for the dissolving process so that the substantial portion of the sodium bicarbona is wash out of the vessel without dissolving into the water sprayed into the vessel.

SUMMARY OF THE INVENTION

The invention is directed to solve the prior art problems, and to provide an improved apparatus for preparing a fluid for a medical procedure.

Further, the objective of the invention is to provide an opener for unsealing a vessel containing a medicament used for preparing the fluid for a medical procedure

Further, the objective of the invention is to provide a cutter for the opener.

The invention provides an apparatus for preparing a fluid for a medical procedure by mixing of at least one medicament in the form of powder with water, the medicament is held in a vessel which defines a bottom, a side wall, and a top opening which is closed by an membrane for sealing the inside of the vessel. The apparatus includes a source of water for dissolving the medicament. An opener is provided for opening the membrane of the vessel. The opener includes a holder for vertically holding the vessel to downwardly orient the opening; a cutter, provided beneath the opening of the vessel held by the holder, for partially cutting the membrane along the periphery of the opening; a mechanism for vertically moving the holder toward the cutter so that the cutting edge of the cutter pierces to partially separate the membrane from the periphery of the opening

whereby the medicament in the vessel falls from the vessel; a receiving member, in the form of a mesh provided beneath the cutter, for receiving all of the medicament from the vessel; and a nozzle for directing water from the source of water in the form of a spray to the medicament received by the receiving member to dissolve the medicament into the water directed onto the medicament. A tank is provided for receiving and containing the substances dissolved into the sprayed water.

According to one feature of the invention, the tank is adapted to receive the water from the water source. The apparatus further includes a circulating system for supplying the water from the tank to the nozzle.

According to another feature of the invention, the opener may include a housing for enclosing the cutter and the receiving member. The holder is vertically displaceable relative to the housing; and the nozzle is attached to the housing to direct the water to the medicament received by the receiving member from outside of the housing.

According to another feature of the invention, the mechanism includes a feed screw vertically supported for rotation; a motor, connected to one end of the feed screw, for rotating the screw; a nut engaging the feed screw; and a member connected between the nut and the holder.

According to another feature of the invention, the cutting edge includes a serrated portion provided along the inclined end. The serrated portion may be partially provided along the inclined end of the cutter body and, in particular, disposed on the proximal half of the inclined end. The serrated portion may be provided all around the inclined end of the cutter body.

DESCRIPTION OF THE DRAWINGS

These and other objects and advantages and further

description will now be discussed in connection with the drawings in which:

Figure 1 is a vertical section of an embodiment of an opener according the invention;

5 Figure 2 is a vertical section of the opener along line I - I in Figure 1;

Figure 3 is a vertical section of a holder according to the embodiment shown in Figure 1;

10 Figure 4 is a partially enlarged side view of a vessel according to the embodiment shown in Figure 1;

Figure 5A is a side view of a cutter according to the embodiment shown in Figure 1;

Figure 5B is another side view of the cutter in the direction VB - VB in Figure 5A;

15 Figure 5C is a horizontal section of the cutter along line VC - VC in Figure 5A;

Figure 5D is a partially enlarged section of the cutting edge of the cutter along line VD - VD in Figure 5E;

20 Figure 5E is a partially enlarge side view of the cutting edge of the cutter;

Figure 6 is a perspective view of a cutter according to another embodiment of the invention;

25 Figure 7 is a cutter support according the embodiment shown in Figure 1;

Figure 8 is a vertical section of an opener according to another embodiment of the invention;

Figure 9A is a side view of a cutter according to the embodiment shown in Figure 8;

30 Figure 9B is another side view of the cutter shown in Figure 9A;

Figure 9C is a plan view of the cutter viewed in the direction of IXC - IXC in Figure 1A;

35 Figure 10 is an opener according to another embodiment of the invention; and

Figure 11 is an apparatus for preparing a fluid for a medical procedure according to the invention.

0985580-062001

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figure 11 shows an example of an apparatus for preparing a fluid for a medical procedure according an embodiment of the invention. The apparatus 300 includes a tank 302 for containing the fluid, first and second openers 100 and 200 for opening bottles or first and second vessels 10 and 30 which contain medicament in the forms of powder and liquid, respectively. A pump 304 is provided for circulation of the liquid within the apparatus 300. RO water is supplied to the tank 302 from a RO water source 320 through a supply conduit 318. The RO water contained in the tank 302 is then supplied to the first opener 100 through a main conduit 306 including the pump 304 and a branch conduit 308 connected between the main conduit 306 and the first opener 100. Likewise, the RO water is supplied to the second opener 200 through the main conduit 306 and a branch conduit 314 connected between the main conduit 306 and the second opener 200.

The first opener 100 opens the seal of the first vessel 10 to remove the medicament in the form of powder from the first vessel 10 and receives it. The medicament received by the first opener 100 is dissolved into the OR water supplied to the first opener 100. The liquid containing the dissolved medicament flows back to the tank 302 through a return conduit 312.

Likewise, the second opener 200 opens the seal of the second vessel 30 to remove the medicament in the form of liquid from the second vessel 30. The medicament from the second vessel 30 is mixed with the OR water supplied to the second opener 100, and the mixture flows back to the tank 302 through a return conduit 316.

With reference to Figures 1 - 7, the first opener 100 according to the embodiment of the invention will be described below.

The first opener 100 includes a housing defined by upper and lower housings 102 and 104 and a bottom 105

which are connected to each other by a clamp rings 108 and 110. The upper housing 102 defines an upper open end 102a for receiving a holder 106. The holder 106 is displaceable relative to and within the upper housing 102 in the vertical direction along the central axis "O" of the housing. The bottom 105 has an outlet 105a which is adapted for the connection with the conduit 312.

With reference to Figure 3, the holder 106 has a substantially cylindrical side wall 118 defining an upper open end 106a for receiving a first vessel 10, as described hereinafter, and a neck 114 defining a lower opening end 106b. The neck 114 further defines a plurality of inwardly extending lugs 116 which are equally disposed at its upper end and an inwardly extending annular stop 114a adjacent to its lower end. The side wall 118 may have a plurality of inclined ribs 118a for aiding the insertion of the first vessel 10.

The first vessel 10 is adapted to contain solid medicament in the form of power or granular and has a bottom 12, a side wall 14 and a neck 16 which has a radius smaller than the side wall 14. The side wall 14 includes a cylindrical portion 14a and a truncated cone portion 14b which connects the end of the upper cylindrical portion 14a opposite to the bottom 12 to one end of the neck 16.

With reference to Figure 4, the neck 16 includes a plurality of engagement portions 20 and screw portions 22. Each of the engagement portions includes a guide portion spirally extending along the outer surface of the neck 16, a stop portion 20b provided upper end of the spirally extending guide portion 20a and a protrusion 20c. The neck 16 further defines an opening 18 which is air-tightly sealed by a seal in the form of a membrane 24. Though the opening 18, a solid medicament in the form powder or granules is charged into and removed from the first vessel 10.

The engagement portions 20 are equally disposed on

the outer surface of the neck 16 about the axis 02 of the first vessel 10 so that space 16a is provided between the stop 20b and the end of the guide 20a of the adjacent engagement portion 20. Likewise, the screw portions 22
5 are disposed on the outer surface of the neck 16 to provide the spaces 16a between the adjacent screws 22. The spaces 16a allow the passage of the protrusions 20c when the first vessel 10 is attached to the holder 112.

Figures 1 and 2 show the first opener 100 with the first vessel 10 mounted thereto. The first opener 100
10 has a cutter 150 which is provided within the housing opposite to the opening 18 of the first vessel 10.

The upper housing 102 of the first opener 100 is vertically supported by a stationary frame 112. The
15 frame 112 has a pair of arms 112a which extend horizontally along the outer surface of the side wall upper housing 102 and are secured thereto by a plurality of screws 112b (Fig. 2).

The first opener 100 further includes a mechanism
20 120 for vertically moving the holder 106. The mechanism 120 includes an electric motor 122 attached to the frame 112 by a bracket 122a, and a vertically extending feed screw 124 supported by bearings 130a and 130b at the ends of the screw 124. At the lower end of the feed screw 124
25 is connected to the shaft 122b of the motor 122 by a coupling 126. A nut 128 which engages the feed screw 124 is mounted to a connection member 140. The connection member 140 has a pair of arms 140a which extend horizontally along the outer surface of the side wall of
30 the cutter support 160 and are secured thereto by a plurality of screws 140b (Fig. 2).

With reference to Figures 5A to 5E, the configuration of the cutter 150 is described below.

The cutter 150 includes a substantially cylindrical
35 cutter body 150 with a lower end defining a threaded portion 154, a flange 155 provided over the threaded portion 154, and an inclined upper end 156 defining an

0356530 062001

cutting edge. The cutter body 152 further includes a plurality of openings 152a (four openings 152a are shown in this embodiment) which define columns 152b supporting the upper portion of the cutter body 152.

5 The upper end 156 inclines from a plane perpendicular to the axis of the cutter body 152 by an angle α (Fig. 5B) of, preferably, 15 - 30 degrees. From the peak of the inclined end 156, a slit 158 vertically extends to one of the opening 152a. The inclined end 156
10 includes a plain cutting edge portion 156a which extend along upper half of the inclined end 156 and a serrated edge portion 156b provided on the lower half of the inclined end 156. Figure 5D shows a portion of the serrated portion 156b, and Figure 5E shows a partial side
15 section of the serrated portion 156b along line VE - VE in Figure 5D. The pitch "P" (see Figure 5E), the distance between the peaks of the adjacent teeth of the serrated portion 156a, may be 1 - 5 mm, preferably 3 mm, and the depth "D" of the teeth may be 1 - 5 mm,
20 preferably 3 mm. Further, the attack angle β may be 15 - 30 degrees, preferably 20 degrees. Further, the serrated portion may be provided all around the inclined end of the cutter body as shown in Figure 6.

 The cutter 150 is attached to and supported by an
25 inner frame 160 which is clamped between the upper and lower housings 102 and 104. With reference to Figure 7, the inner frame 160 includes a circular base 162 adapted to be clamped by the housings 102 and 104 with seal rings 162a provided therebetween (Figs. 1 and 2), and a central
30 mount 164 which is connected to the circular base 162 by radial spokes 168. The central mount 164 has a substantially cylindrical shape with a central bore including a threaded inner surface and a stop 162. The cutter 150 is attached to the central mount 164 through
35 the engagement between the threaded portion 154 of the cutter 150 and the threaded inner surface of the central

mount 164 with O-rings 150a and 150b clamped therebetween (Figs. 1 and 2).

5 A receiving member 170, for receiving the solid medicament falling down from the first vessel 10 when the seal is broken by the first opener 100, is provided between the lower housing 104 and the bottom 105. The receiving member 170 includes a screen which can receive the medicament from the first vessel 10. The size of the powder of granules of sodium bicarbonate of 200 μm is
10 generally used for preparing a fluid for dialysis treatment. Therefore, the mesh size of the screen is of at most 200 μm . On the other hand, a screen having a unnecessarily small mesh size, for example under 20 μm , inhibits the flow of the solution through the mesh, which
15 results in increase in the pressure within the housing above the screen to break the seal of the first opener 100. The typical mesh size for the screen is of at least 20 μm , preferably 50 - 150 μm .

20 A water supply nozzle 180 is mounted to the housing of the first opener 100 and connected to the branch conduit 308. The water supply nozzle 180 is oriented to the receiving member 170 to direct the water in the form of a spray onto the medicament received on the receiving member 170.

25 The first opener 100 further includes a pair of washing nozzles 182 and 184 connected to a branch conduit 310 which is further connected to the main conduit 306 (Fig. 11). The washing nozzles 182 and 184 are horizontally oppositely oriented to the cutter 150 to
30 direct the liquid from the tank 302 in the form of a spray for the purpose of washing inside of the housing of the first opener 100 and the cutter 150 after an operation of dissolving the medicament received on the receiving member 170 by spraying the RO water from the
35 water supplying nozzle 180.

With reference to Figures 8 - 9C, the second opener

200 will be described below.

The second opener 200 is configured substantially the same as the first opener 100, except that the second opener 200 is adapted to open the seal of the second vessel 30 for containing a liquid medicament while the first opener 100 is adapted to open the first vessel 10 for containing a solid medicament in the form of power or granular.

The second opener 200 includes upper housing 202 and lower housing 204 which are connected to each other by a clamp ring 208 to define the housing of the second opener 200. The lower housing defines a bottom of the housing and an outlet 204a for connection with the return conduit 316 (Fig. 11).

The upper housing 202 vertically displaceably receives a holder 206 for holding the second vessel 30. A mechanism 220, which is configured substantially the same as the mechanism 120 of the first opener 100, is provided for vertically moving the holder 206 relative to the upper housing 202.

A cutter 250 is provided within the housing opposite to the opening of the first vessel 30. The cutter 250 is formed substantially the same as the cutter 150 of the first opener 100, except that the cutter 250 of the second opener 200 is formed into one piece while the cutter 150 of the first opener 100 includes two pieces. The cutter 250 includes substantially a cylindrical cutter body 252 and a circular base portion 254. The cutter body 252 is disposed at the center of the circular base portion 254 and supported by radial spokes 260. The circular base portion 254 is adapted to be clamped by the housings 202 and 204 with seal rings provided therebetween (Figs. 1 and 2),

The cutter body 252 includes an inclined upper end 256 defining an cutting edge. The upper end 256 inclines from a plane perpendicular to the axis of the cutter body 252, the same as the cutter of the first opener 100.

From the peak of the inclined end 256, a slit 258 vertically extends into the cutter body 252. The inclined end 256 includes an plain cutting edge portion 256a which extend along upper half of the inclined end 256 and a serrated edge portion 256b provided on the lower half of the inclined end 256.

A water supplying nozzle 262 is attached to the bottom of the lower housing 204. The water supplying nozzle 262 is oriented substantially to the center of the cutter 250 to direct the water in the form of a spray to the inside of the second vessel 200 through the central bore of the cutter 250 for the purpose of flushing the inside of the second vessel.

The functional operation of the apparatus for preparing a fluid for a medical procedure of the invention will be described below.

First, the first and second vessels 10 and 30 are mounted to the first and second openers 100 and 200, respectively. The first and second vessels 10 and 30 are inverted after their caps (not shown) are removed. The necks 16 and 36 of the first and second vessels 10 and 30 are inserted into the bores defined by the necks 114 and 214 of the holders 106 and 206 of the first and second openers 100 and 200, respectively, so that the lugs 116 and 216 pass through the spaces 16a (only the space 16a of the first vessel 10 is shown in the drawings) provided on the outer surfaces of the necks 16 and 36. When the ends of the necks 16 and 36 abut the stops 114a and 214a of the holders 206 and 306, the first and second vessels 10 and 30 are rotated to engage the protrusions 20c (only the protrusions 20c of the first vessel 10 are shown in the drawings) provided on the outer surfaces of the necks 16 and 36 with the lugs 116 and 216. This secures the first and second vessels 10 and 30 to the holders 106 and 206 of the first and second openers 100 and 200.

After the first and second vessels 10 and 30 are mounted to the first and second openers 100 and 200, the

contents of the first and second vessels 10 and 20 are removed. In the following description, the operation of removing the solid medicament contained within the first vessel will be described.

5 The mechanism 120 may be activated by an operator so that the nut 128, the connection member 140 and the holder 106 with the first vessel 10 secured to the holder 106 move downwardly. When the tips 156c of the cutting edge 156a of the cutter 150 contact the membrane 24
10 closing the opening 18 of the first vessel 10, the cutter 150 initiates cutting the membrane 24 in the opposite direction along the inner periphery of the opening 18 of the neck 16. Penetration of the inclined end 156 into the membrane 24 proceeds the cutting operation so that
15 the membrane 24 is cut along the inner periphery of the opening 18, except for a portion which is located corresponding to the location of the slit 158. The serrated portion 156b aids the cutting performance when the cutting operation is advanced and the tension in the
20 membrane is reduced.

Then, the mechanism 120 moves the nut 128, the connection member 140, the holder 106 and the holder 106 upwardly from the cutter 150. Moving the vessel 10 from the cutter 150 makes the solid medicament within the
25 first vessel 10 to fall down onto the receiving member 170. At this time, the portion of the membrane 24 which has not been cut by the cutter 150 due to the slit 158 keeps the membrane 24 connected to the neck 16. The water is directed to the solid medicament on the
30 receiving member 170 through nozzle 180 to dissolve the solid medicament into the sprayed water. The solution flows back to the tank 302 through the outlet 105a and the conduit 312. The tank 302 must have a volume at least the volume of the first opener 100 to receive all
35 of the solution at once.

After the solid medicament is completely solved, the water supply through the nozzle 180 is ended and the

washing nozzles 182 and 184 start to spray water to clean the inside of the housing 102, 104 and 105 and the cutter 150. In particular, the openings 152a of the cutter 150 allow the sprayed water to access the inside of the hollow cutter 150 sufficiently.

The second opener 200 functions substantially the same as the first opener 100 except that, while the first vessel 10 contains a solid medicament, the second vessel 30 mounted to the second opener 200 contains a liquid medicament so that the dissolving operation of the content of the vessel is not required. Thus, unsealing the membrane attached to the opening of the second vessel 30 removes the liquid medicament from the second vessel 30 so that the liquid medicament flows to the tank 302 through the outlet 204a of the second opener 200 without any operation. After completion of the evacuation of the second vessel 30, the water supplying nozzle 262 sprays water toward the inside of the second vessel through the central bore of the cutter 250 to clean the insides of housing 202 and 204, the vessel 30 and the cutter 250.

With reference to Figure 10, an opener according to another embodiment of the invention will be described below.

The opener 400 includes a housing 402 and a holder 404 to which the vessel 10 is mounted, same as the above-described embodiment. Although it is not shown in Figure 10, the opener 400 also includes a mechanism, substantially the same as the mechanisms 120 and 240.

The holder 404 includes a first plain gear wheel 406 attached to the top of the holder 404. The first gear wheel 406 engages a drive gear wheel 408 attached to a shaft of an electric motor 410. The electric motor 410 is securely mounted to a frame 430. The rotation of the drive gear wheel 408 rotates the holder 404 through the engagement between the drive gear wheel 408 and the first gear wheel 406.

The drive gear wheel 408 also engages a second plain gear wheel 412. The second plain gear wheel 412 is

connected to a bevel gear 414 by a shaft 416 to rotate therewith. The bevel gear 414 engages a second bevel gear 418. A pinion gear 420 is coaxially connected to the second bevel gear 418 to rotate therewith. The
5 pinion gear 420 engages a rack 422 provided on a drive bar 424 which has a stop ring 424a at the end opposite to the rack 422.

Provided beneath the drive bar 424 is a driven bar 426 which horizontally extends through the housing 402.
10 The driven bar 426 is displaceably supported by a bracket 432 at one end, and the housing 492 at the other end. The bracket 432 is connected to the frame 430. A piece 428 is secured to the driven bar 428 to move therewith. The piece 428 has an aperture (not shown in
15 Figure 10) through which the drive bar 424 extends. Provided on the drive bar between the stop ring 424a and the piece 428 is a coil spring 434. Likewise, a coil spring 436 is provided on the driven bar 426 between the piece 428 and the bracket 432.

20 Provided on the driven bar 426 is a knife 438 which has a cutting edge 438a facing the membrane 24 sealingly closing the opening of the first vessel 10. A receiving member 440 in the form of a basket, which includes a screen or mesh provided in at least the bottom and a
25 portion of the side wall, is provided beneath the knife 438. A pair of nozzles 442 is attached to direct water to the solid medicament received by the receiving member 440.

30 The functional operation of the opener 400 will be described below.

The first vessel 10 is mounted to the opener 400, as described above. After the first vessel 10 is mounted to the opener 400, the mechanism, substantially identical to the mechanism 120 and 220, may be activated by an
35 operator to move the holder 404 downwardly with the first vessel 10 secured to the holder 404. The electric motor 410 is activated when the first gear wheel 406 engages

09668580-062001

the drive gear wheel 408. The activation of the electric motor 410 rotates the holder 404 through the engagement between the first gear wheel 406 and the drive gear wheel 408. Further, the activation of the electric motor 410 moves the drive bar 424 to the right in Figure 10 through the gear train of the drive gear wheel 408, the second gear wheel 412, shaft 416, bevel gears 414 and 418, the pinion 420 and the rack 422. When the cutting edge 438a of the knife 438 contacts the membrane 24 closing the opening the first vessel 10, the cutting edge 438a of the knife 438 is substantially at the inside of the opening of the first vessel 10. The rotation of the holder 404 with the first vessel 10 secured to the holder 404 cuts the membrane 24 along the inner periphery of the opening of the first vessel 10.

The activation of the electric motor 410 is continued until the membrane 24 is cut along the inner periphery of the opening except for a portion to keep the membrane 24 cut by the knife 438 connected to the neck 16 by the portion.

When the opening of the first vessel 10 is unsealed, the solid medicament within the first vessel 10 falls down into the receiving member 440. The water is directed to the solid medicament in the receiving member 440 through nozzles 442 to solve the solid medicament into the sprayed water. The solution flows back to the tank 302 through the outlet 402a and the conduit 312.

It will also be understood by those skilled in the art that the forgoing description is a preferred embodiment of the disclosed device and that various changes and modifications may be made without departing from the spirit and scope of the invention.

CLAIM

1. An apparatus for preparing a fluid for a medical procedure by mixing of at least one medicament in the form of powder with water, the medicament being held in a vessel which defines a bottom, a side wall, and a top opening which is closed by an membrane for sealing the inside of the vessel; the apparatus comprising:

a source of water;

an opener for opening the membrane of the vessel, the opener including a holder for vertically holding the vessel to downwardly orient the opening;

a cutter, provided beneath the opening of the vessel held by the holder, for partially cutting the membrane along the periphery of the opening;

a mechanism for vertically moving the holder toward the cutter so that the cutting edge of the cutter pierces and partially separates the membrane from the periphery of the opening whereby the medicament in the vessel falls from the vessel;

a receiving member, in the form of a mesh provided beneath the cutter, for receiving all of the medicament from the vessel; and

a nozzle for directing water from the source of water in the form of a spray to the medicament received by the receiving member to dissolve the medicament into the water directed to the medicament; and

a tank for receiving and containing the substances dissolved in the sprayed water.

2. An apparatus according to claim 1, wherein the tank is adapted to receive the water from the water source; and

the apparatus further comprising a circulating system for supplying the water from the tank to the nozzle.

3. An apparatus according to claim 1 wherein the opener further comprises a housing for enclosing the cutter and the receiving member, the holder being vertically displaceable relative to the housing, and the
5 nozzle is attached to the housing to direct the water to the medicament received by the receiving member from outside of the housing.

4. An apparatus according to claim 1 wherein the
10 mesh size of the receiving member is of at least 20 μm , preferably 50 - 150 μm .

5. An apparatus according to claim 1, wherein the mechanism comprises a feed screw vertically supported for
15 rotation;

a motor, connected to one end of the feed screw, for rotating the screw;

a nut engaging the feed screw; and

a member connected between the nut and the
20 holder.

6. An apparatus according to claim 1, wherein the cutting edge includes a serrated portion provided along the inclined end.
25

7. An apparatus according to claim 6, wherein the serrated portion is partially provided along the inclined end of the cutter body.

8. An apparatus according to claim 7, wherein the serrated portion is disposed on the proximal half of the inclined end.
30

9. An apparatus according to claim 6, wherein the serrated portion is provided all around the inclined end of the cutter body.
35

10. An opener for opening the membrane of a vessel which contains at least one medicament in the form of powder and defines a bottom, a side wall, and a top opening which is closed by an membrane for sealing the inside of the vessel after the vessel receives a predetermined amount of the medicament, the opener comprising:

a holder for vertically holding the vessel to downwardly orient the opening;

a cutter, provided beneath the opening of the vessel held by the holder, for partially cutting the membrane along the periphery of the opening;

a mechanism for vertically moving the holder toward the cutter so that the cutting edge of the cutter pierces and partially separates the membrane from the periphery of the opening whereby the medicament in the vessel falls from the vessel;

a receiving member, in the form of a mesh provided beneath the cutter, for receiving all amount of the medicament from the vessel; and

a nozzle for directing water in the form of a spray to the medicament received by the receiver member to dissolve the medicament into the water directed to the medicament.

11. An opener according to claim 10 further comprising a housing for enclosing the cutter and the receiving member, the holder being vertically displaceable relative to the housing, and the nozzle being attached to the housing to direct the water to the medicament received by the receiving member from outside of the housing.

12. An apparatus according to claim 10 wherein the mesh size of the receiving member is of at least 20 μm ,

preferably 50 - 150 μ m.

13. An opener according to claim 10, wherein the
mechanism comprises a feed screw vertically supported for
rotation;

a motor, connected to one end of the feed
screw, for rotating the screw;

a nut engaging the feed screw; and

a member connected between the nut and the
holder.

14. A cutter for partially cutting a membrane along
a periphery of an opening of a vessel which contains at
least one medicament in the form of powder and defines a
bottom, a side wall, and a top opening which is closed by
an membrane for sealing the inside of the vessel after
the vessel receives a predetermined amount of the
medicament, the cutter comprising:

a cutter body substantially in the form of
a hollow cylinder having an inclined end;

a cutting edge provided along the inclined
end;

a slit extending from the inclined end
into the cutter body.

15. A cutter according to claim 14, wherein the
cutting edge includes a serrated portion provided along
the inclined end.

16. A cutter according to claim 15, wherein the
serrated portion is partially provided along the inclined
end of the cutter body.

17. A cutter according to claim 16, wherein the
serrated portion is disposed on the proximal half of the
inclined end.

5 19. An apparatus for preparing a fluid for a
medical procedure by mixing of first and second
medicaments with water, the first and second medicaments
being held in first and second vessels each of which
defines a bottom, a side wall, and a top opening which is
10 closed by an membrane for sealing the inside of the
vessel; the apparatus comprising:

a first opener for opening the membrane of the first vessel, the first opener including a holder for vertically holding the first vessel to downwardly orient the opening;

20 a mechanism for vertically moving the
holder toward the cutter so that the cutting edge of the
cutter pierces and partially separates the membrane from
the periphery of the opening whereby the medicament in
the vessel falls from the vessel;

30 a nozzle for directing water from the source of water in the form of a spray to the first medicament received by the receiving member to dissolve the first medicament into the water directed to the medicament;

a cutter, provided beneath the opening of

the second vessel held by the holder, for partially cutting the membrane along the periphery of the opening;

5 a mechanism for vertically moving the holder toward the cutter so that the cutting edge of the cutter pierces and partially separates the membrane from the periphery of the opening whereby the second medicament in the vessel falls from the vessel; and

10 a nozzle for directing water from the source of water in the form of a spray to the inside of the second vessel; and

a tank for receiving and containing the substances dissolved into the sprayed water.

098580-062091


ABSTRACT

The invention provides an apparatus for preparing a fluid for a medical procedure by mixing of at least one medicament in the form of powder with water, the medicament is held in a vessel which defines a bottom, a side wall, and a top opening which is closed by an membrane for sealing the inside of the vessel. The apparatus includes an opener for opening the membrane of the vessel. The opener includes a holder for vertically holding the vessel to downwardly orient the opening; a cutter, provided beneath the opening of the vessel held by the holder, for partially cutting the membrane along the periphery of the opening; a mechanism for vertically moving the holder toward the cutter so that the cutting edge of the cutter pierces to partially separate the membrane from the periphery of the opening whereby the medicament in the vessel falls from the vessel; a receiving member, in the form of a mesh provided beneath the cutter, for receiving all of the medicament from the vessel; and a nozzle for directing water from the source of water in the form of a spray to the medicament received by the receiving member to dissolve the medicament into the water directed to the medicament.

09868530, 062001

1/13

Fig. 1

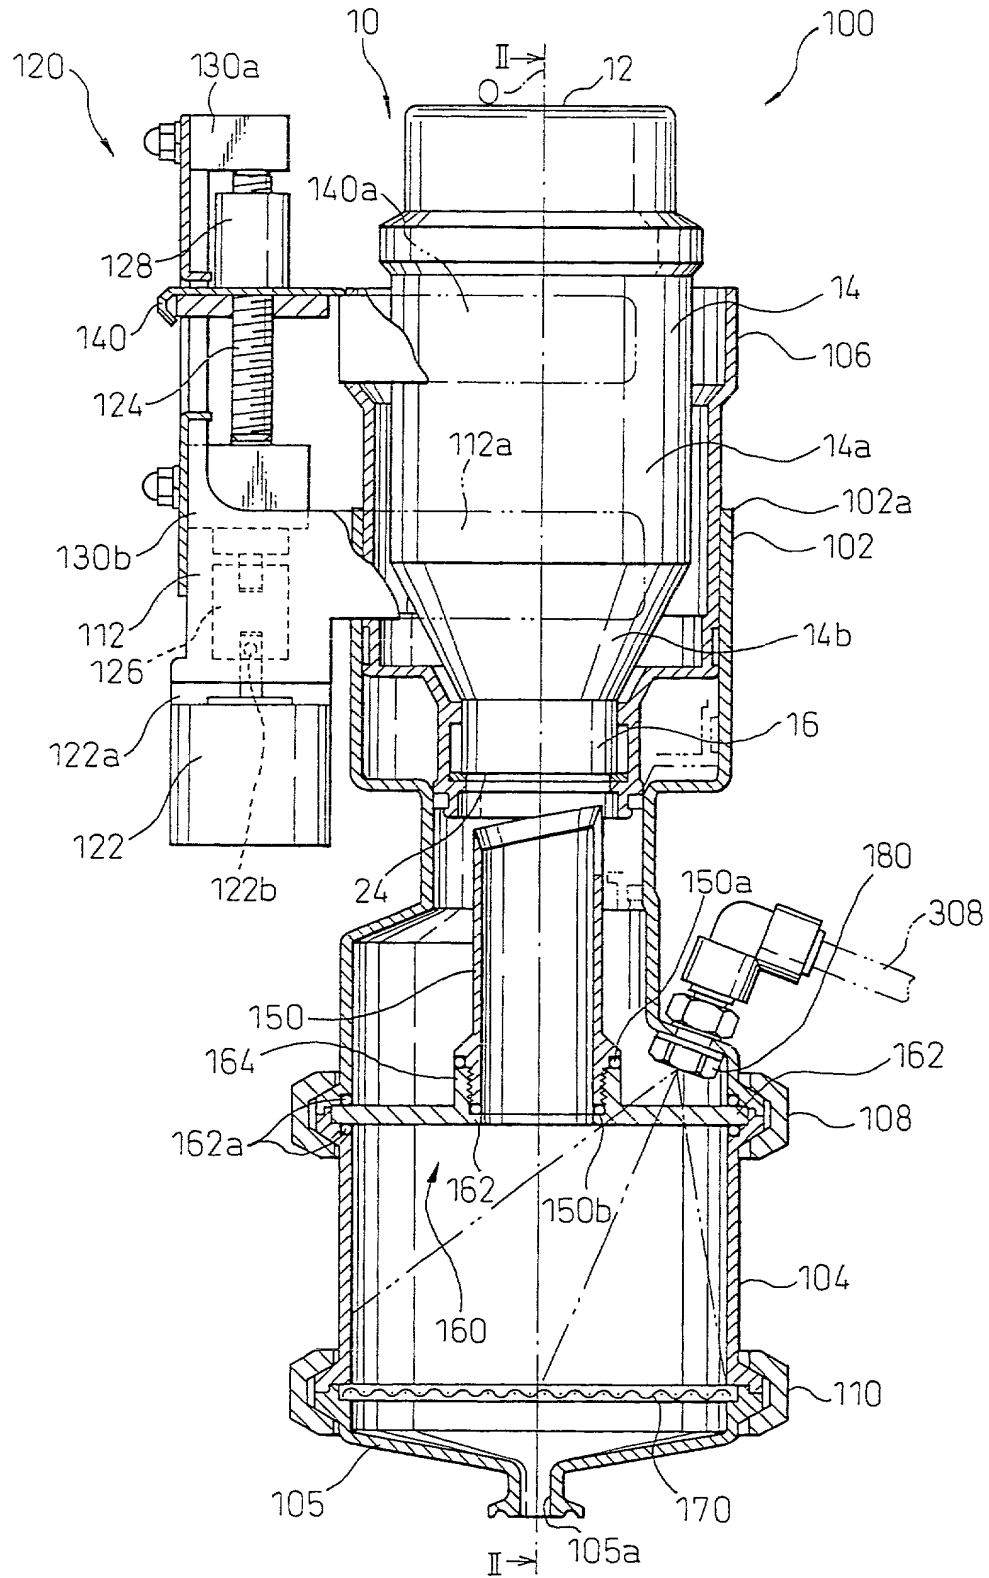

2/13

Fig.2


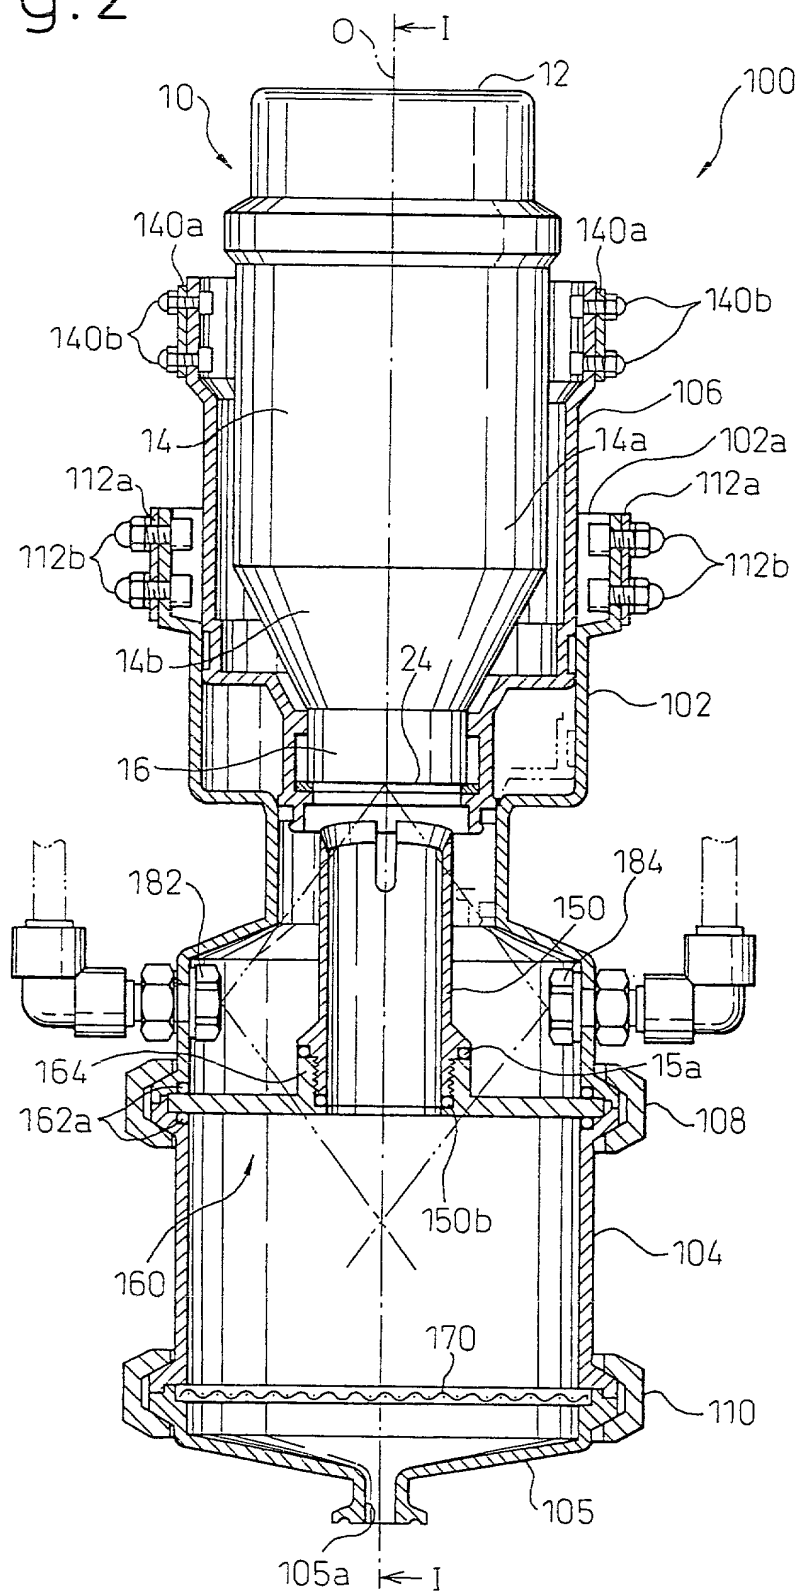


Fig.3

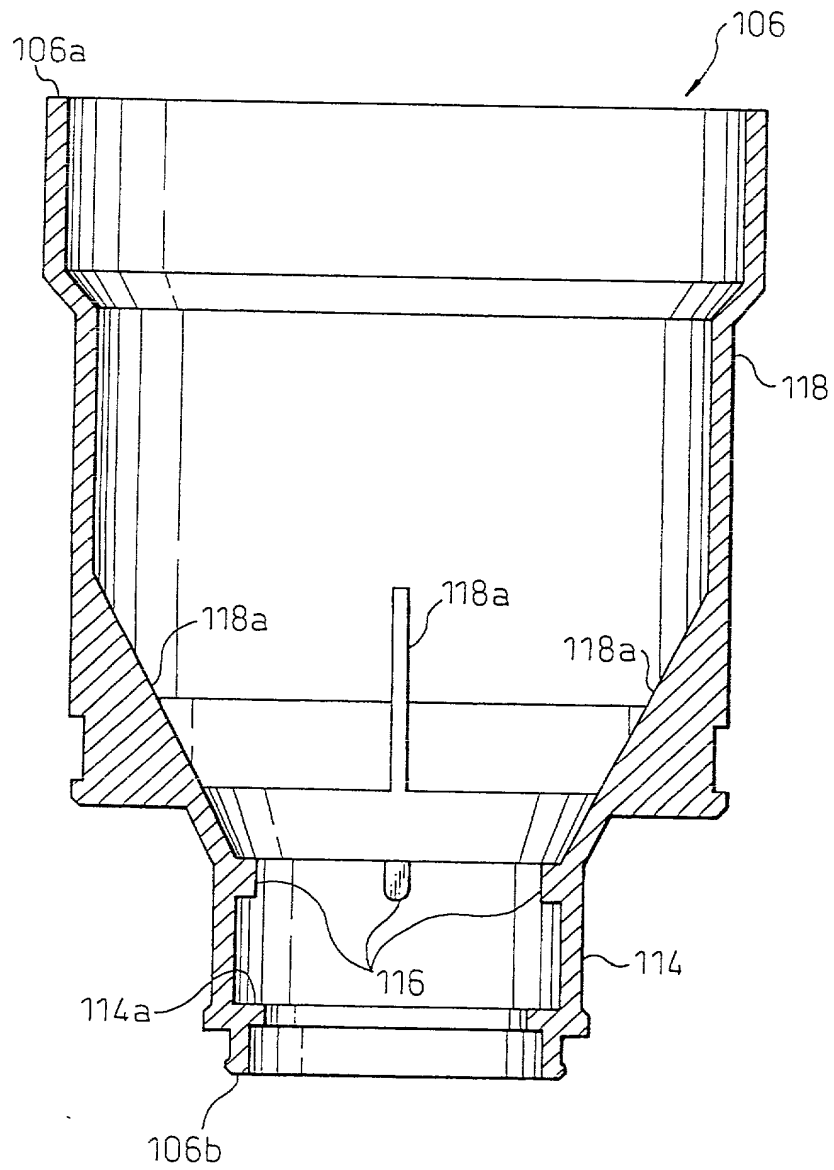

4/13

Fig.4

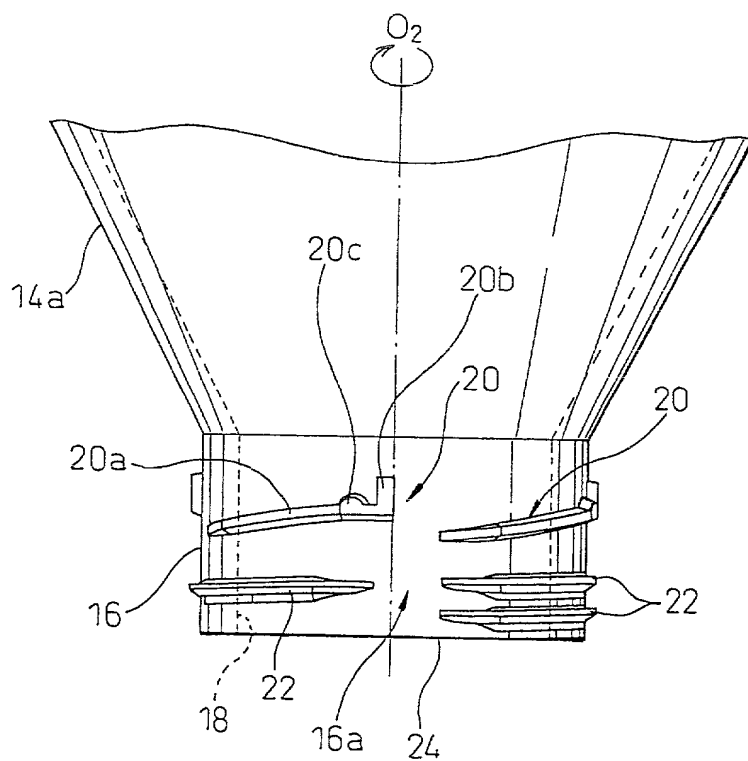


Fig. 5A


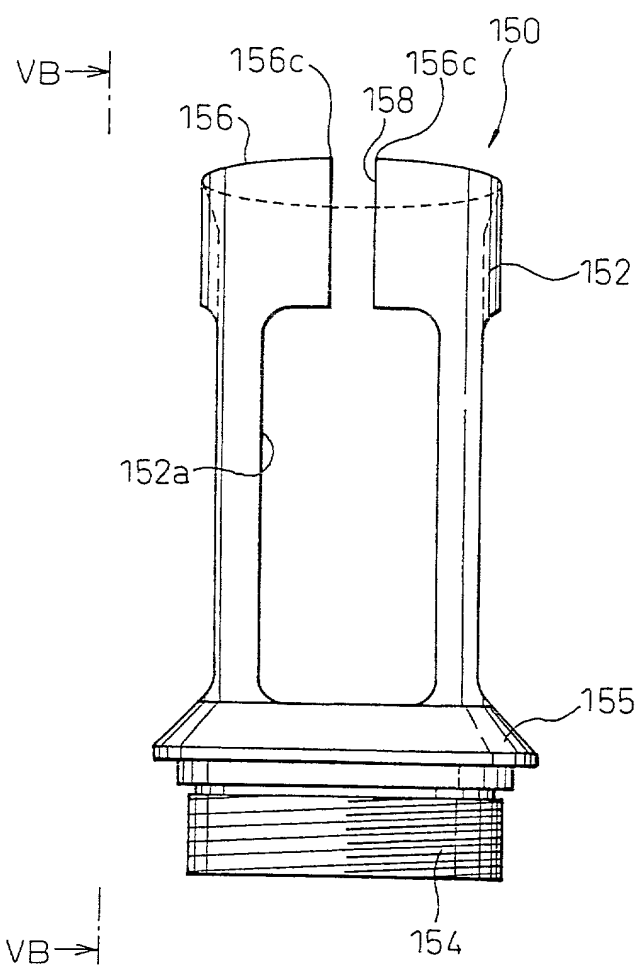


Fig. 5B

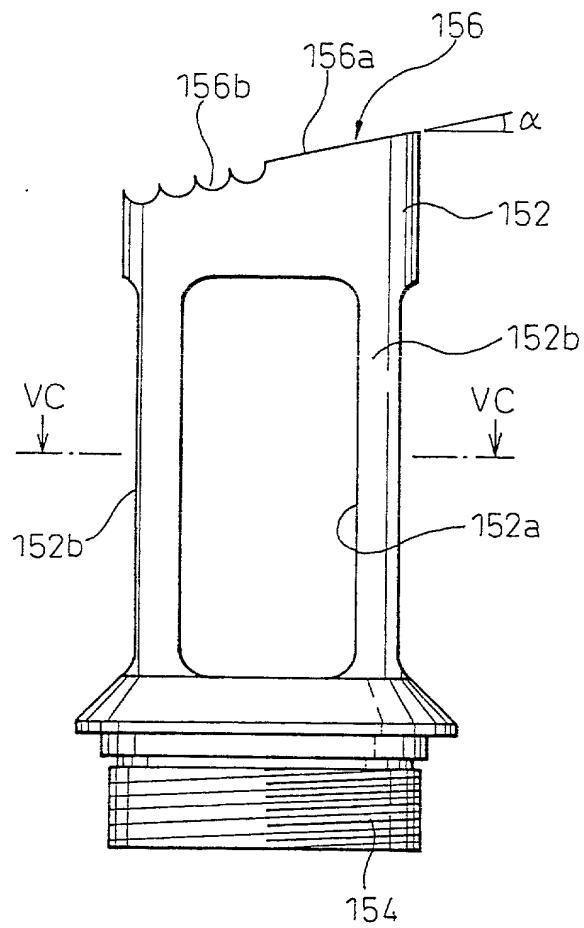

7/13

Fig. 5C

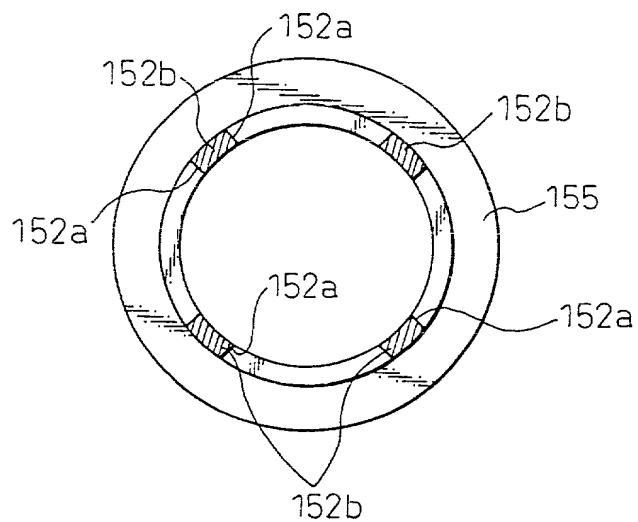


Fig. 5D


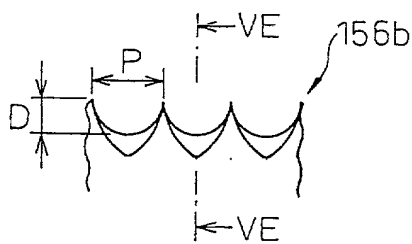


Fig. 5E



8/13

Fig.6



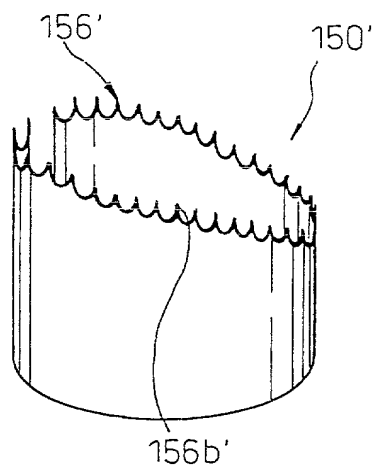


Fig.7

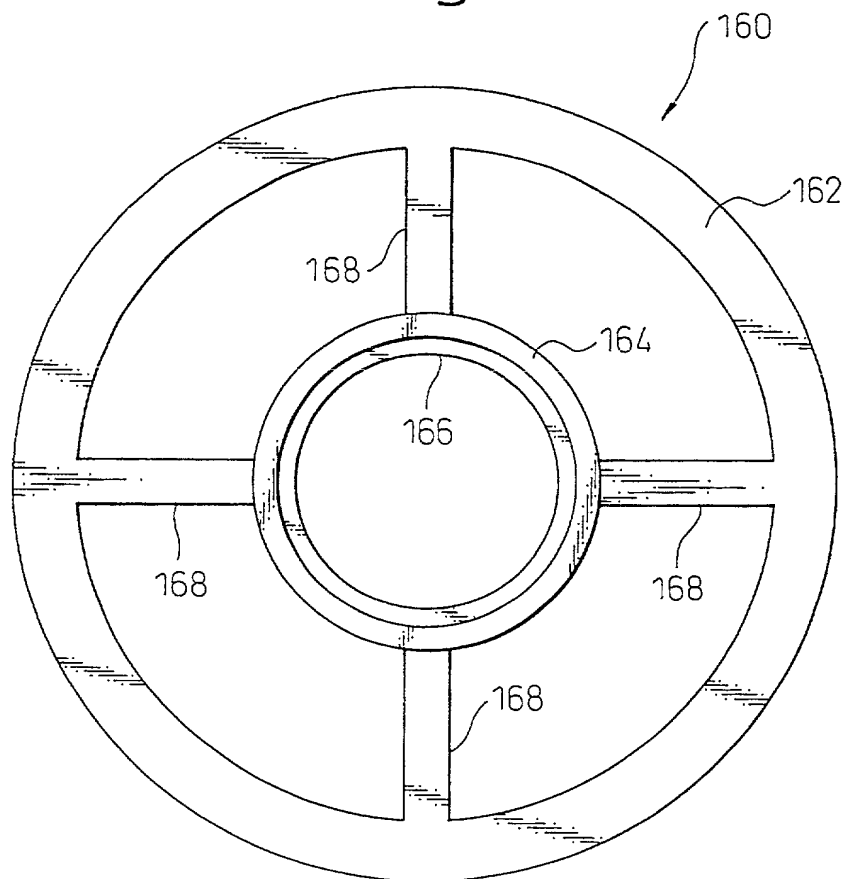

9/13

Fig.8

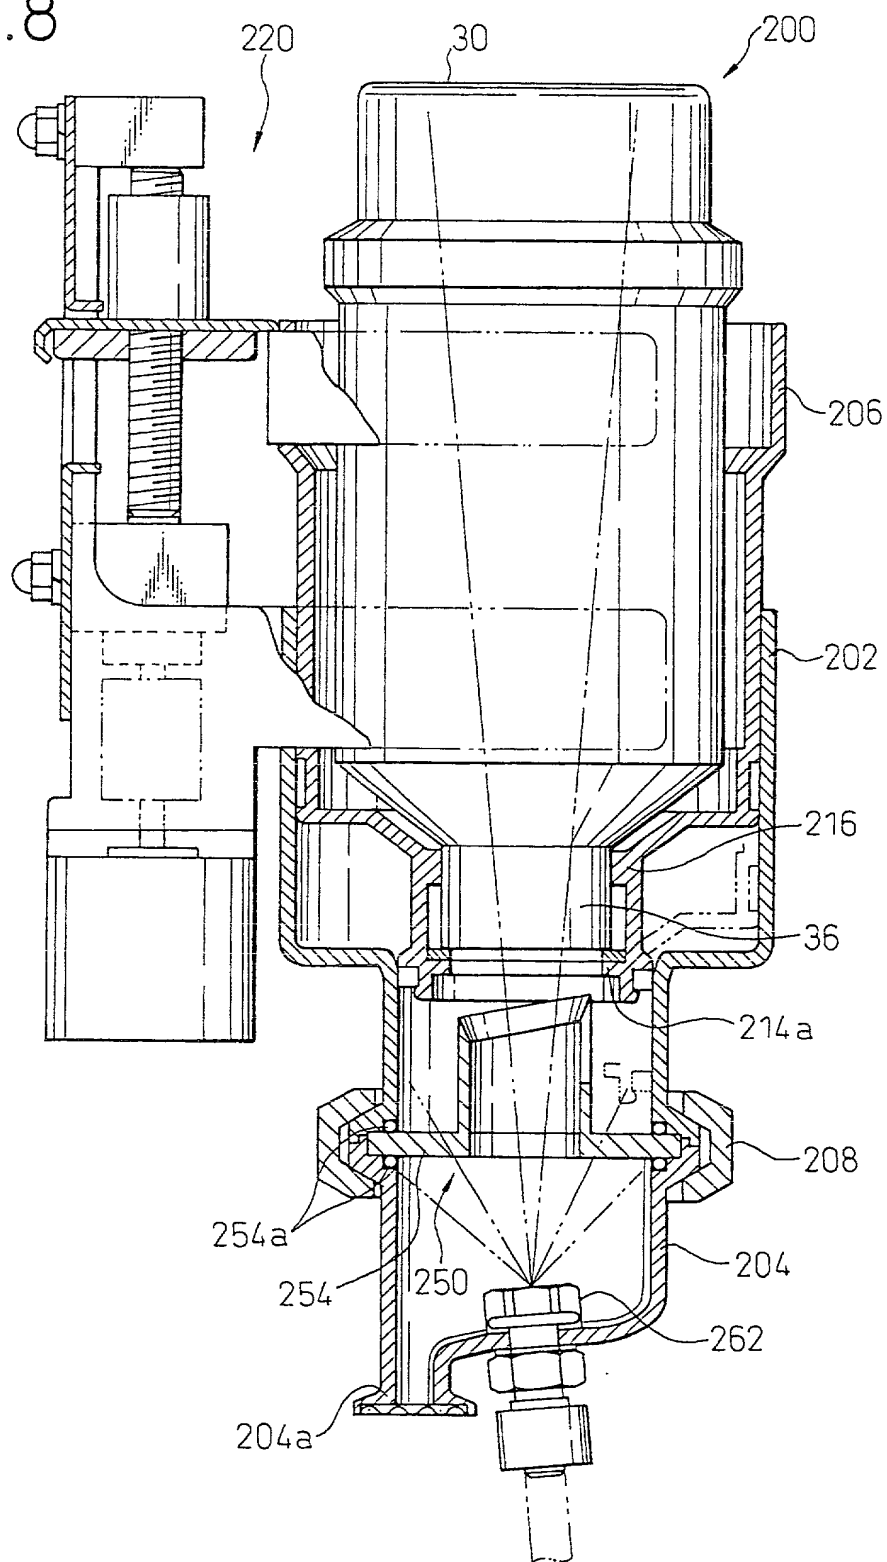

10/13

Fig.9A

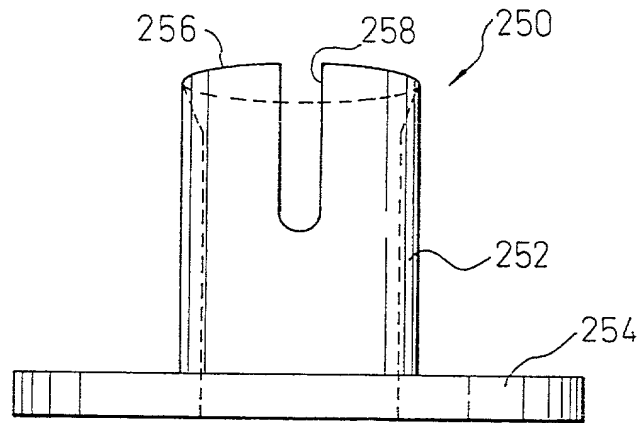


Fig.9B



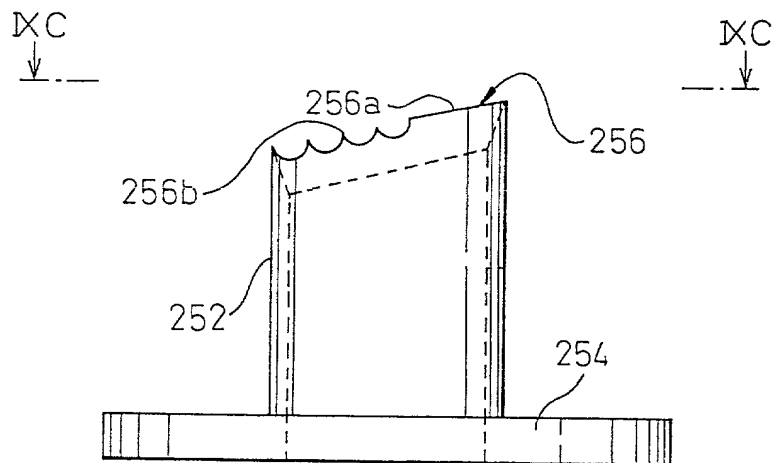



Fig.9C

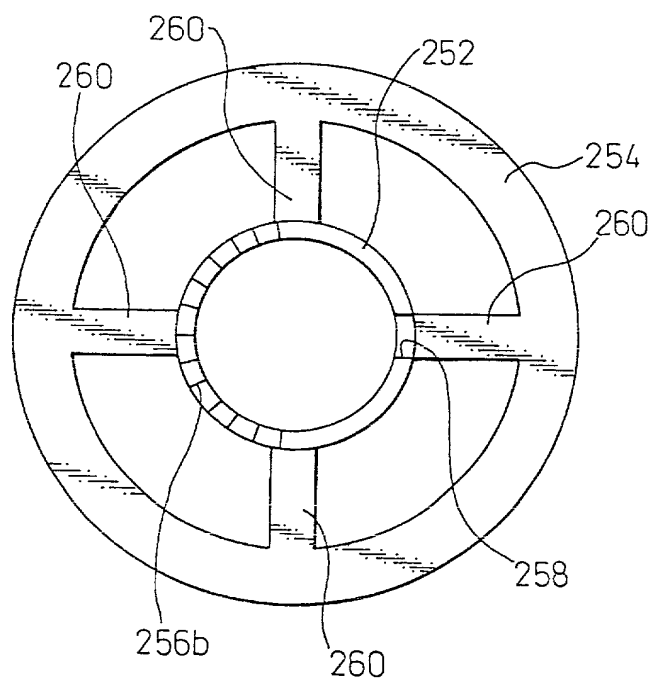

12/13

Fig.10

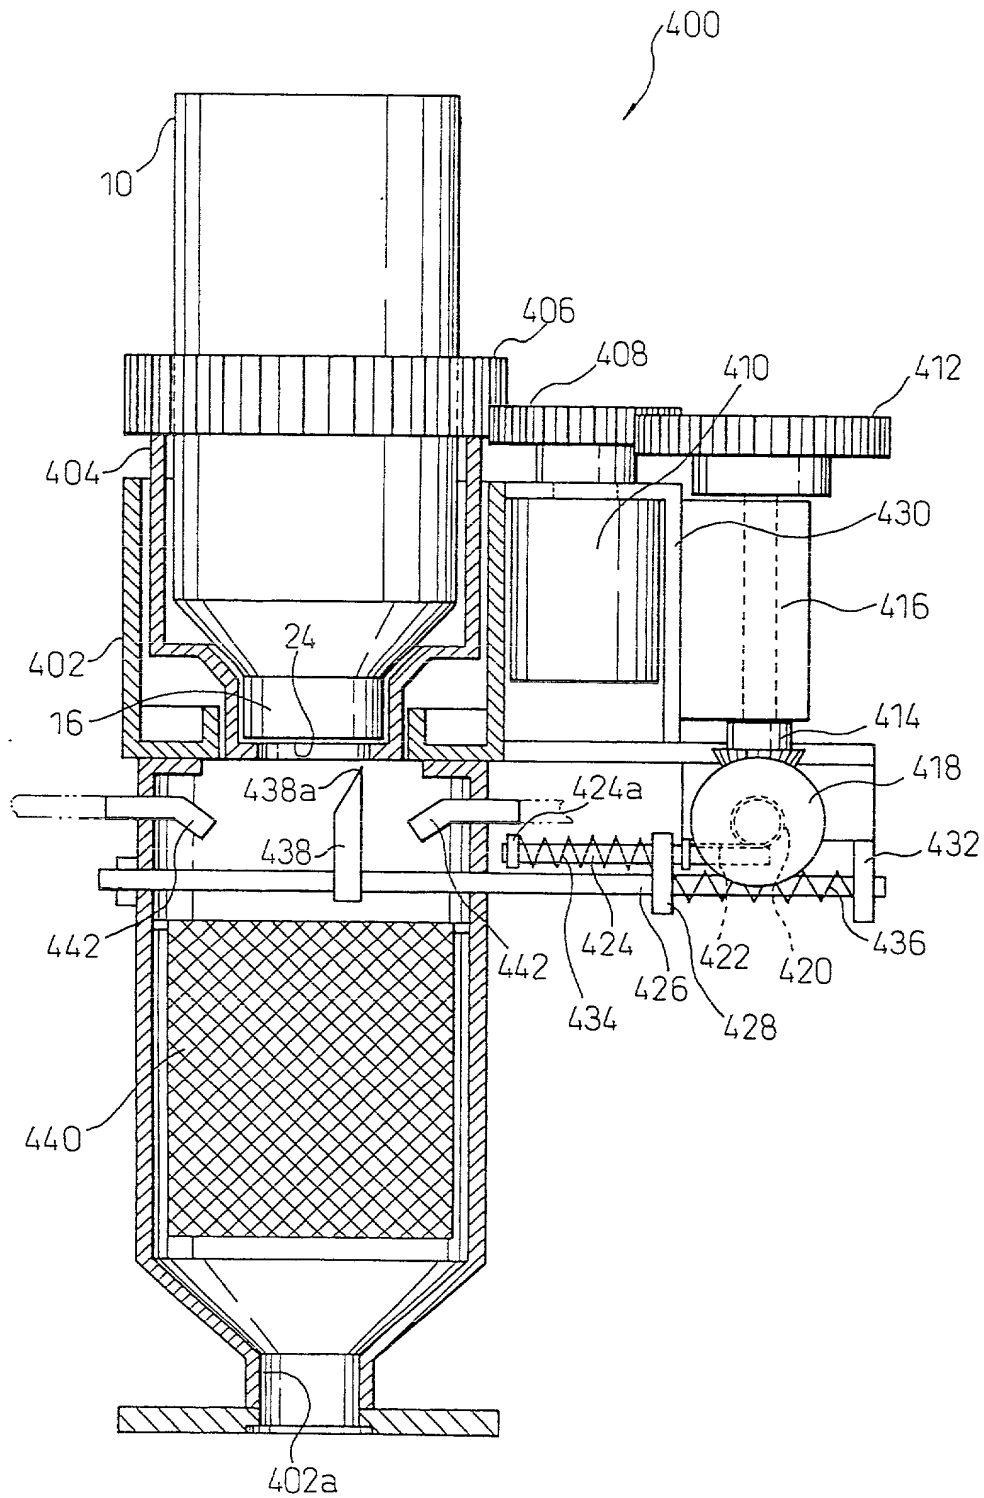

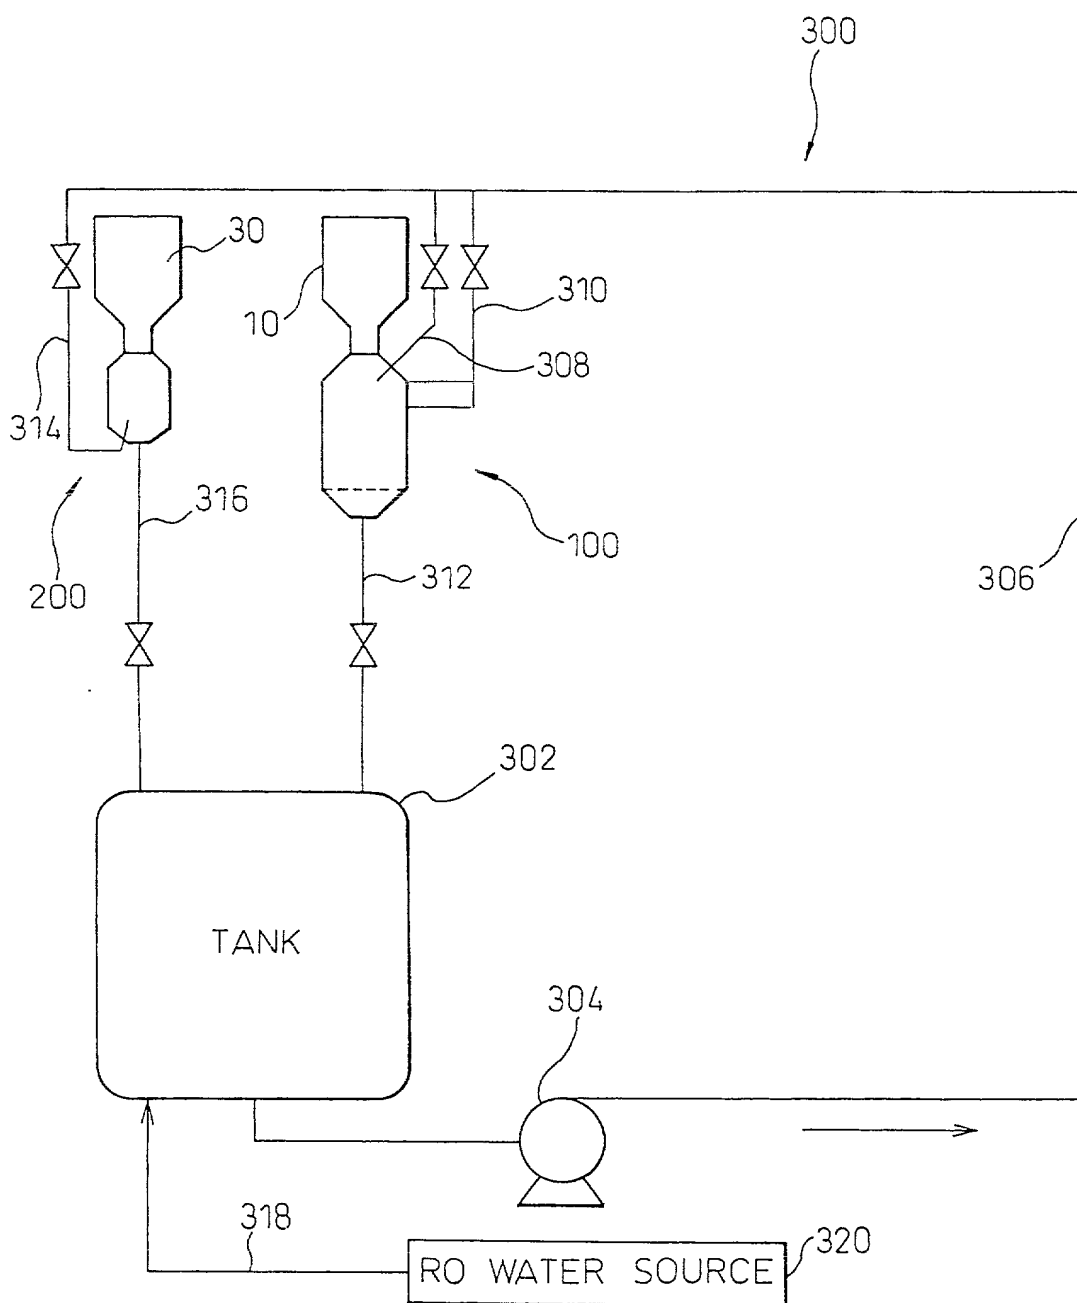

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。 As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

AN APPARATUS FOR PREPARING A FLUID FOR

A MEDICAL PROCEDURE

上記発明の明細書（下記の欄で x 印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
(該当する場合) _____ に訂正されました。

☐ was filed on December 21, 1999
as United States Application Number or
PCT International Application Number
PCT/JP99/07165 and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第 37 編第 1 条 5 6 項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願について外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

I hereby claim foreign priority under Title 35, United States Code, Section 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

外国での先行出願

Priority Claimed

優先権主張

10-362828 (Pat. Appln.)

Japan

21/December/1998

(Number)

(Country)

(Day/Month/Year Filed)

☒☐

(番号)

(国名)

(出願年月日)

Yes

No

はい

いいえ

(Number)

(Country)

(Day/Month/Year Filed)

☐☐

(番号)

(国名)

(出願年月日)

Yes

No

はい

いいえ

私は、第35編米国法典第119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)
(出願番号)(Filing Date)
(出願日)(Application No.)
(出願番号)(Filing Date)
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Application No.)
(出願番号)(Filing Date)
(出願日)(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)(Application No.)
(出願番号)(Filing Date)
(出願日)(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じるところに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣言を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration
(日本語宣言書)

委任状： 私は下記の発明者として、本出願に関する一切の
手続きを米特許商標局に対して遂行する弁理士または代理人
として、下記の者を指名いたします。(弁理士、または代理
人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint
the following attorney(s) and/or agent(s) to prosecute this
application and transact all business in the Patent and Trademark
Office connected therewith : customer No. 23353 and :

John E. McGarry 22,360
Richard D. Grauer 22,388
Ronald P. Kananen 24,104
H. Lawrence Smith 24,900
Ralph T. Rader 28,772
Michael D. Fishman 31,951
Joel E. Bair 33,356
Joseph V. Coppola, Sr. 33,373
Shmuel Livnat 33,949
Michael B. Stewart 36,018
Mark A. Davis 37,118

Alexander D. Rabinovich 37,425
Kevin D. Rutherford 40,412
Glenn E. Forbis 40,610
Kristin L. Murphy 41,212
Matthew J. Russo 41,282
Christopher M. Tanner 41,518
Robert S. Green 41,800
G. Thomas Williams 42,228
David K. Benson 42,314
Brian K. Dutton 47,255

書類送付先

RADER, FISHMAN & GRAUER PLLC
1233 20th Street, N.W.
Suite 501
Washington, D.C. 20036

Send Correspondence to:

RADER, FISHMAN & GRAUER PLLC
1233 20th Street, N.W.
Suite 501
Washington, D.C. 20036

直接電話連絡先： (名前及び電話番号)

(202) 955-3750

Direct Telephone Calls to: (name and telephone number)

(202) 955-3750

唯一または第一発明者名	100	Full name of sole or first inventor	Naohiko Moriyama
発明者の署名	日付	Inventor's signature	Naohiko Moriyama
住所		Residence	Chiyoda-ku, Tokyo, Japan JPK
国籍		Citizenship	Japanese
私書箱		Post Office Address	c/o TELJIN LIMITED, 1-1, Uchisaiwaicho 2-chome, Chiyoda-ku, Tokyo 100-0011, Japan
第二共同発明者	200	Full name of second joint inventor, if any	Tetsuya Yano
第二共同発明者の署名	日付	Second inventor's signature	T. Yano
住所		Residence	Hino-shi, Tokyo, Japan JPK
国籍		Citizenship	Japanese
私書箱		Post Office Address	c/o TELJIN LIMITED, Tokyo Research Center, 3-2, Asahigaoka 4-chome, Hino-shi, Tokyo 191-0065, Japan

(第三以降の共同発明者についても同様に記載し、署名をす
ること)

(Supply similar information and signature for third and
subsequent joint inventors.)

Japanese Language Declaration

第三共同発明者氏名	300	Full name of third joint inventor Ken Imai
同発明者の署名	日付	Inventor's signature Date K. Imai 5/25/01
住所		Residence Hino-shi, Tokyo, Japan JPX
国籍		Citizenship Japanese
郵便の宛先		Post Office Address c/o TEIJIN LIMITED, Tokyo Research Center, 3-2, Asahigaoka 4-chome, Hino-shi, Tokyo 191-0065, Japan
第四共同発明者	400	Full name of fourth joint inventor, if any Tsuneo Deguchi
同発明者の署名	日付	Inventor's signature Date T. Deguchi 5/29/01
住所		Residence Hino-shi, Tokyo, Japan JPX
国籍		Citizenship Japanese
郵便の宛先		Post Office Address c/o TEIJIN LIMITED, Tokyo Research Center, 3-2, Asahigaoka 4-chome, Hino-shi, Tokyo 191-0065, Japan

第五共同発明者氏名		Full name of fifth joint inventor
同発明者の署名	日付	Inventor's signature Date
住所		Residence
国籍		Citizenship
郵便の宛先		Post Office Address
第六共同発明者		Full name of sixth joint inventor, if any
同発明者の署名	日付	Inventor's signature Date
住所		Residence
国籍		Citizenship
郵便の宛先		Post Office Address